



END USER INSTRUCTIONS - READ BEFORE USE


PRODUCT NAME:

Multi-Axis (M-Ax) Mount

PART NUMBER:

MX-00020C (Ops-core)

OPS-CORE COMPATIBLE

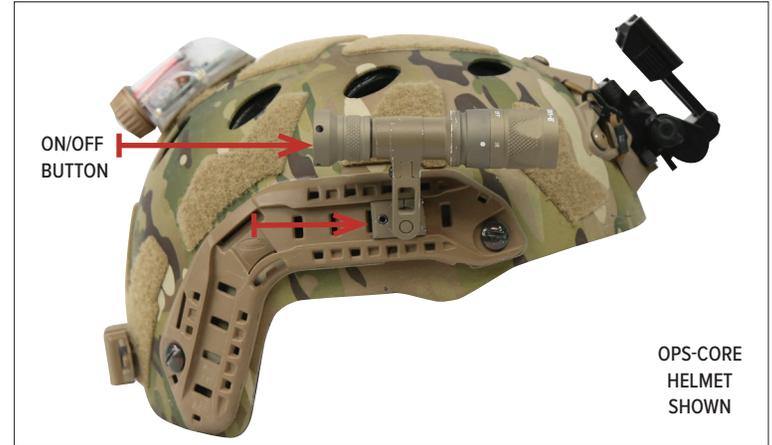

Screw A (x1) Locks the flashlight body in left or right side of the helmet orientation.

Screw B (x1) is the set screw used to lock the product into the Ops-core Rail.

Screw C (x2) tensions the ball socket joint. This joint provides the multi-axis maneuvering of the product.

NOTE:

Product ships pre-assembled to install on the right side of helmet.

SureFire® 3V tailcap and light components sold separately.



The Multi-Axis Mount (M-Ax Mount) comes assembled with all screws tightened for general usage. Tighten/loosen for personal preference.



Slide the M-Ax Mount onto the Ops-core rail and lock into rail by tightening Screw B



Attach tailcap and light component to the M-Ax Mount



If left side is preferred, rotate mount and insert in rail as instructed.

OPEN CAMERA TO VIEW USER INSTRUCTIONS OR VISIT WWW.SSPGEAR.COM/END-USER-INSTRUCTIONS





END USER INSTRUCTIONS - READ BEFORE USE


PRODUCT NAME:

Multi-Axis (M-Ax) Mount

PART NUMBER:

MX-0002TW (Team Wendy)

TEAM WENDY COMPATIBLE

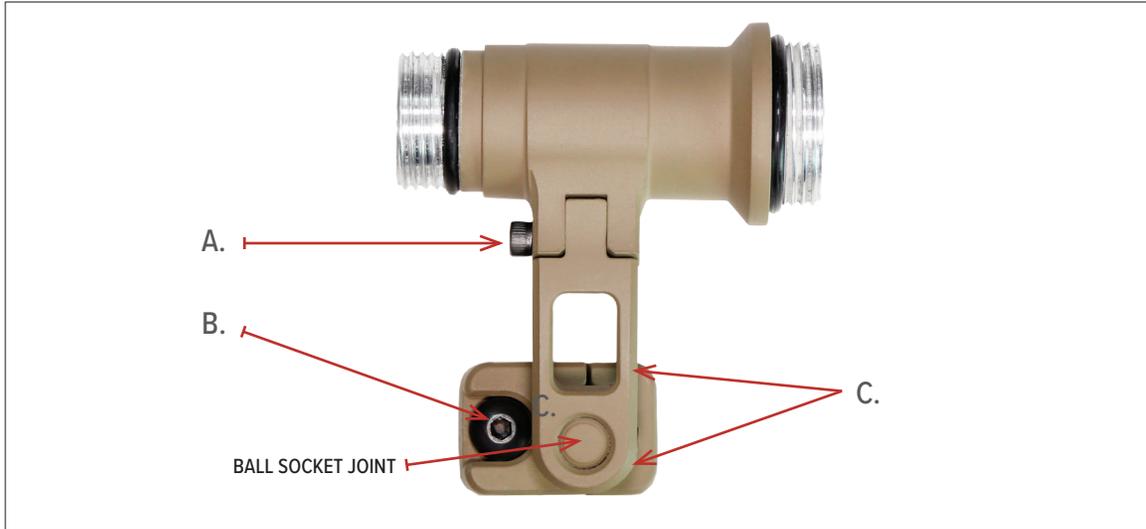

Screw A (x1) Locks the flashlight body in left or right side of the helmet orientation.

Screw B (x1) is the set screw used to lock the product into the Team Wendy Rail.

Screw C (x2) tensions the ball socket joint. This joint provides the multi-axis maneuvering of the product.

NOTE:

Product ships pre-assembled to install on the right side of helmet.

SureFire® 3V tailcap and light components sold separately.



The Multi-Axis Mount (M-Ax Mount) comes assembled with all screws tightened for general usage. Tighten/loosen for personal preference.



Slide the M-Ax Mount onto the Team Wendy rail and lock into rail by tightening Screw B



Attach tailcap and light component to the M-Ax Mount



If left side is preferred, rotate mount and insert in rail as instructed.

OPEN CAMERA TO
VIEW USER INSTRUCTIONS OR VISIT
WWW.SSPGEAR.COM/
END-USER-INSTRUCTIONS

